


# Top View

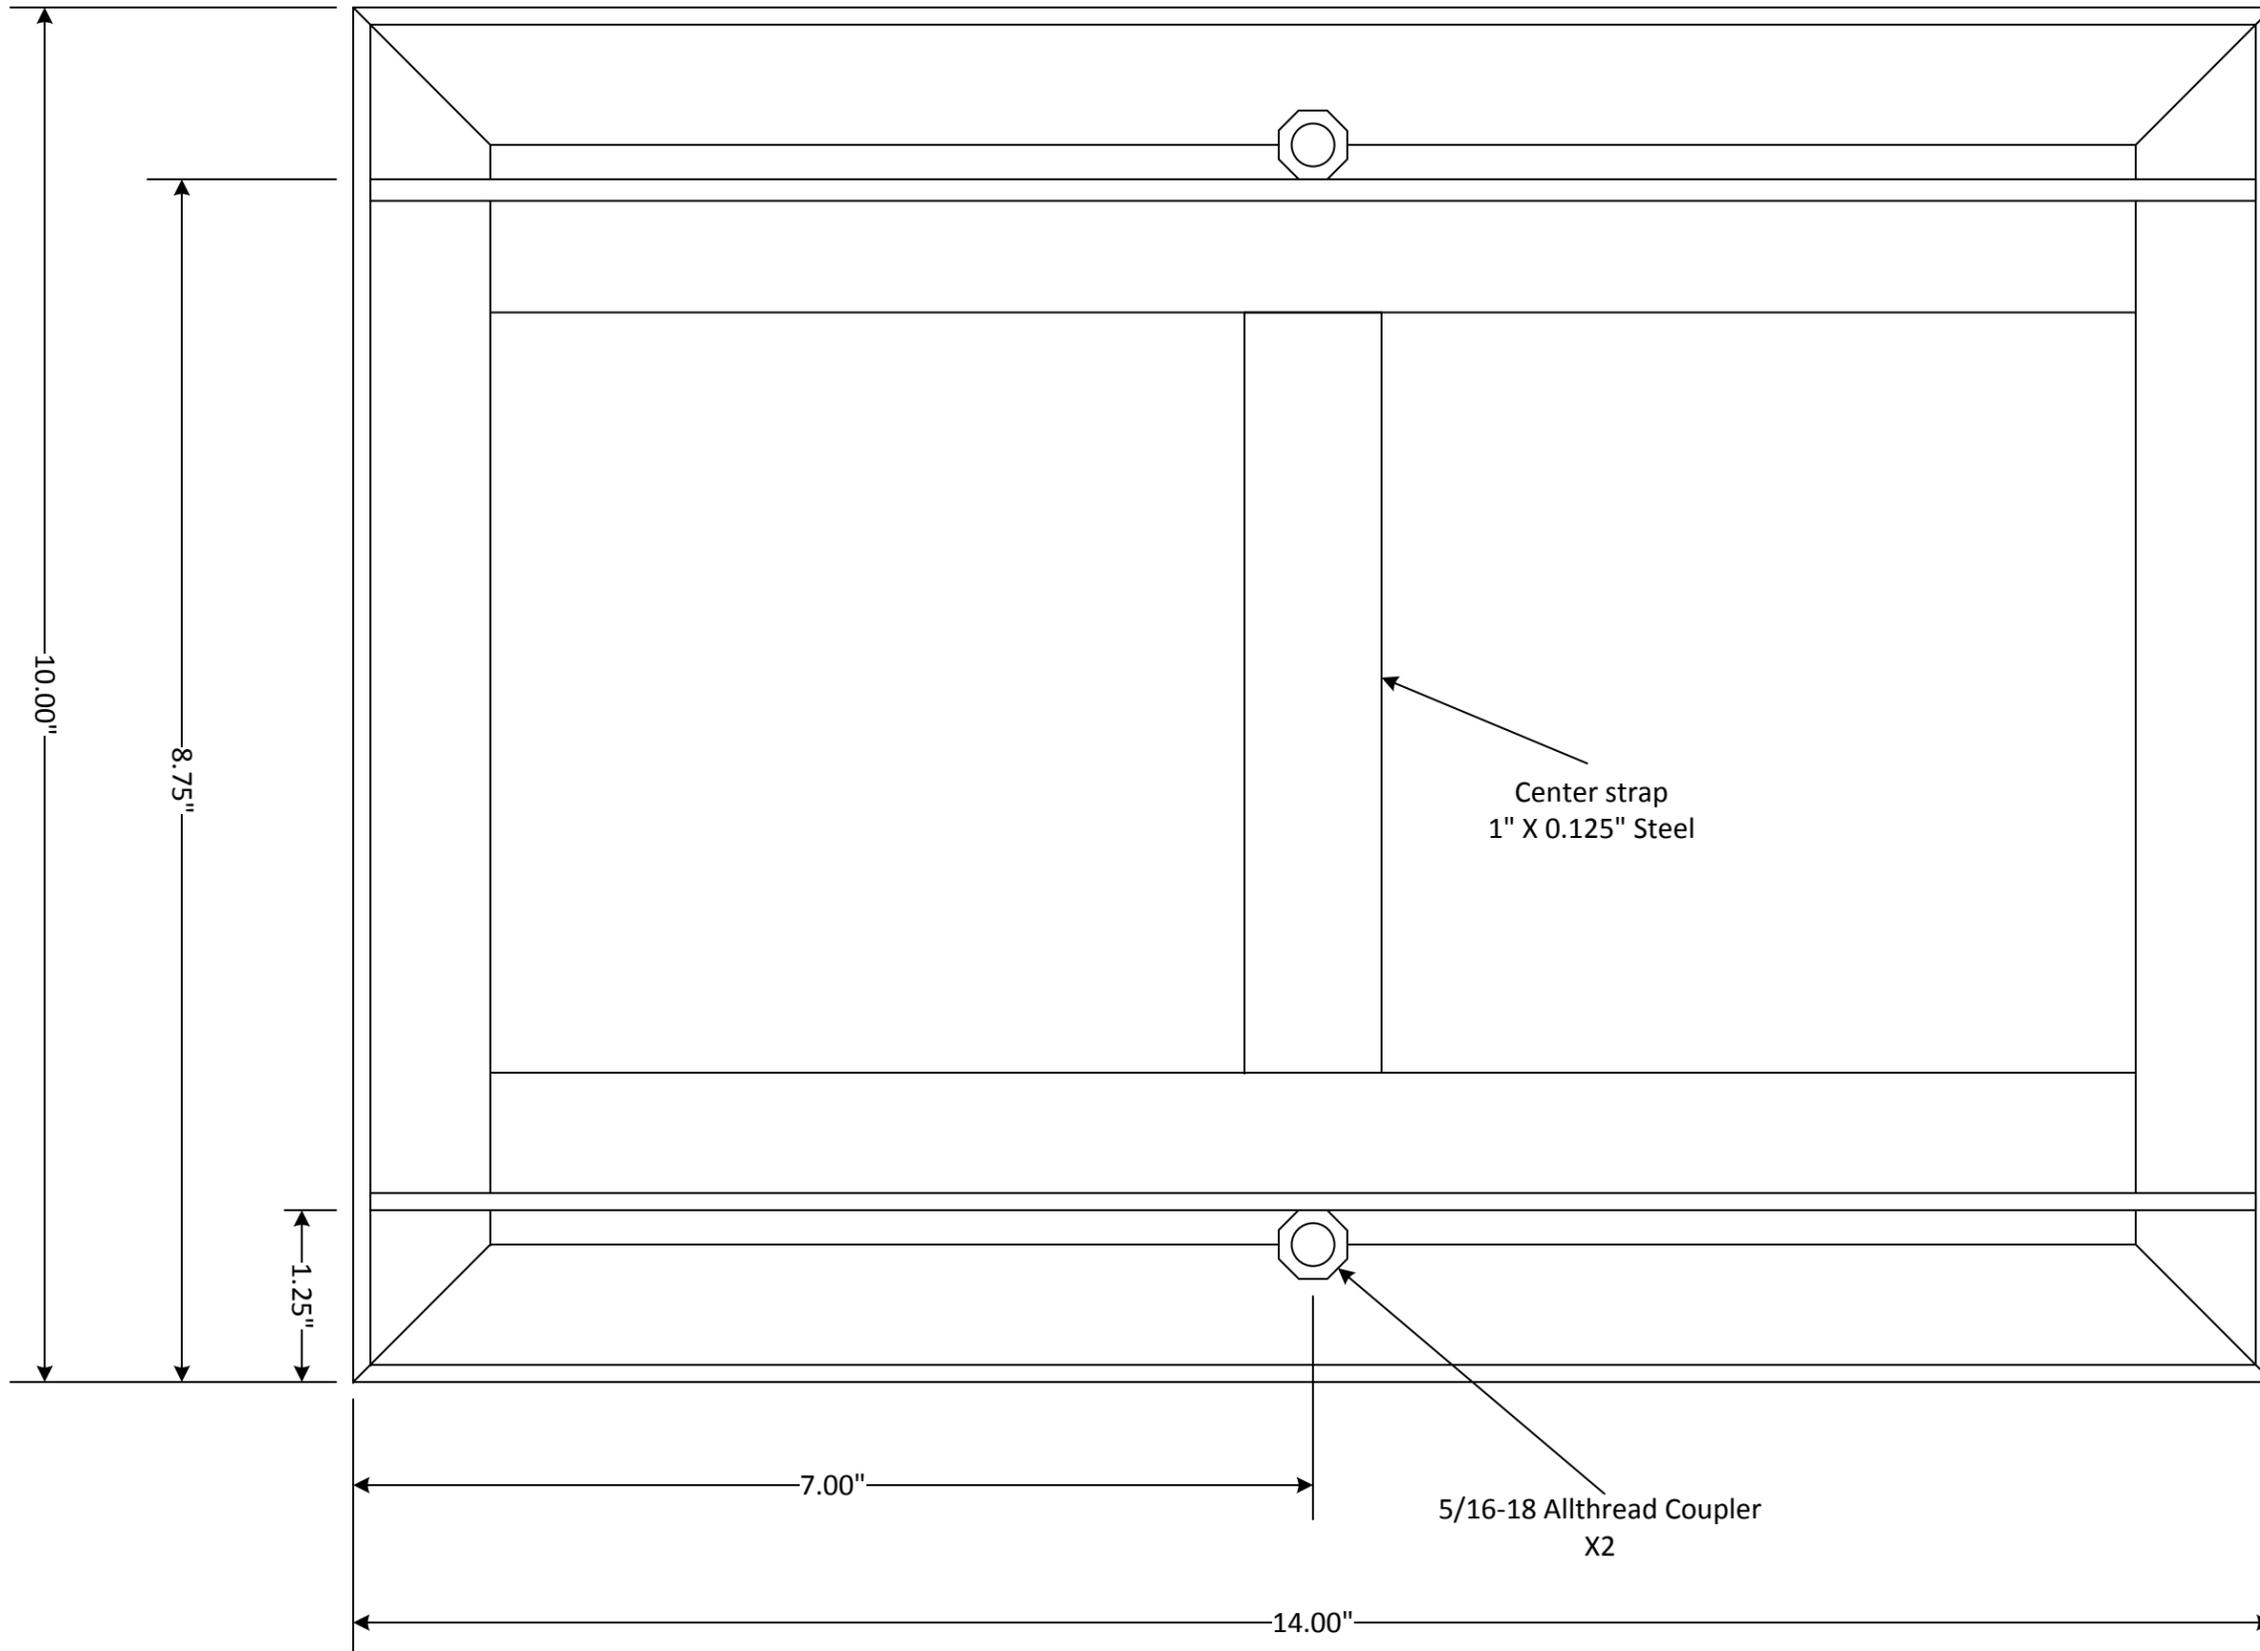

## Notes

All parts are 1" angle iron unless noted otherwise.

Allthread couplers are 7/8" tall. Welded the length and at bottom.

Box to be covered on five sides with 3/8" plywood. All edges rounded with 1/2" round over bit.

Plywood and all metal to be treated with undercarriage spray.


Box to be skinned with 0.04" aluminum.

Vent (West Marine P/N:226993) to be installed on front near top.

Four 1/2" drain holes to be drilled in bottom.

1/4" rubber mat at bottom of box for battery to rest on.


# Front View

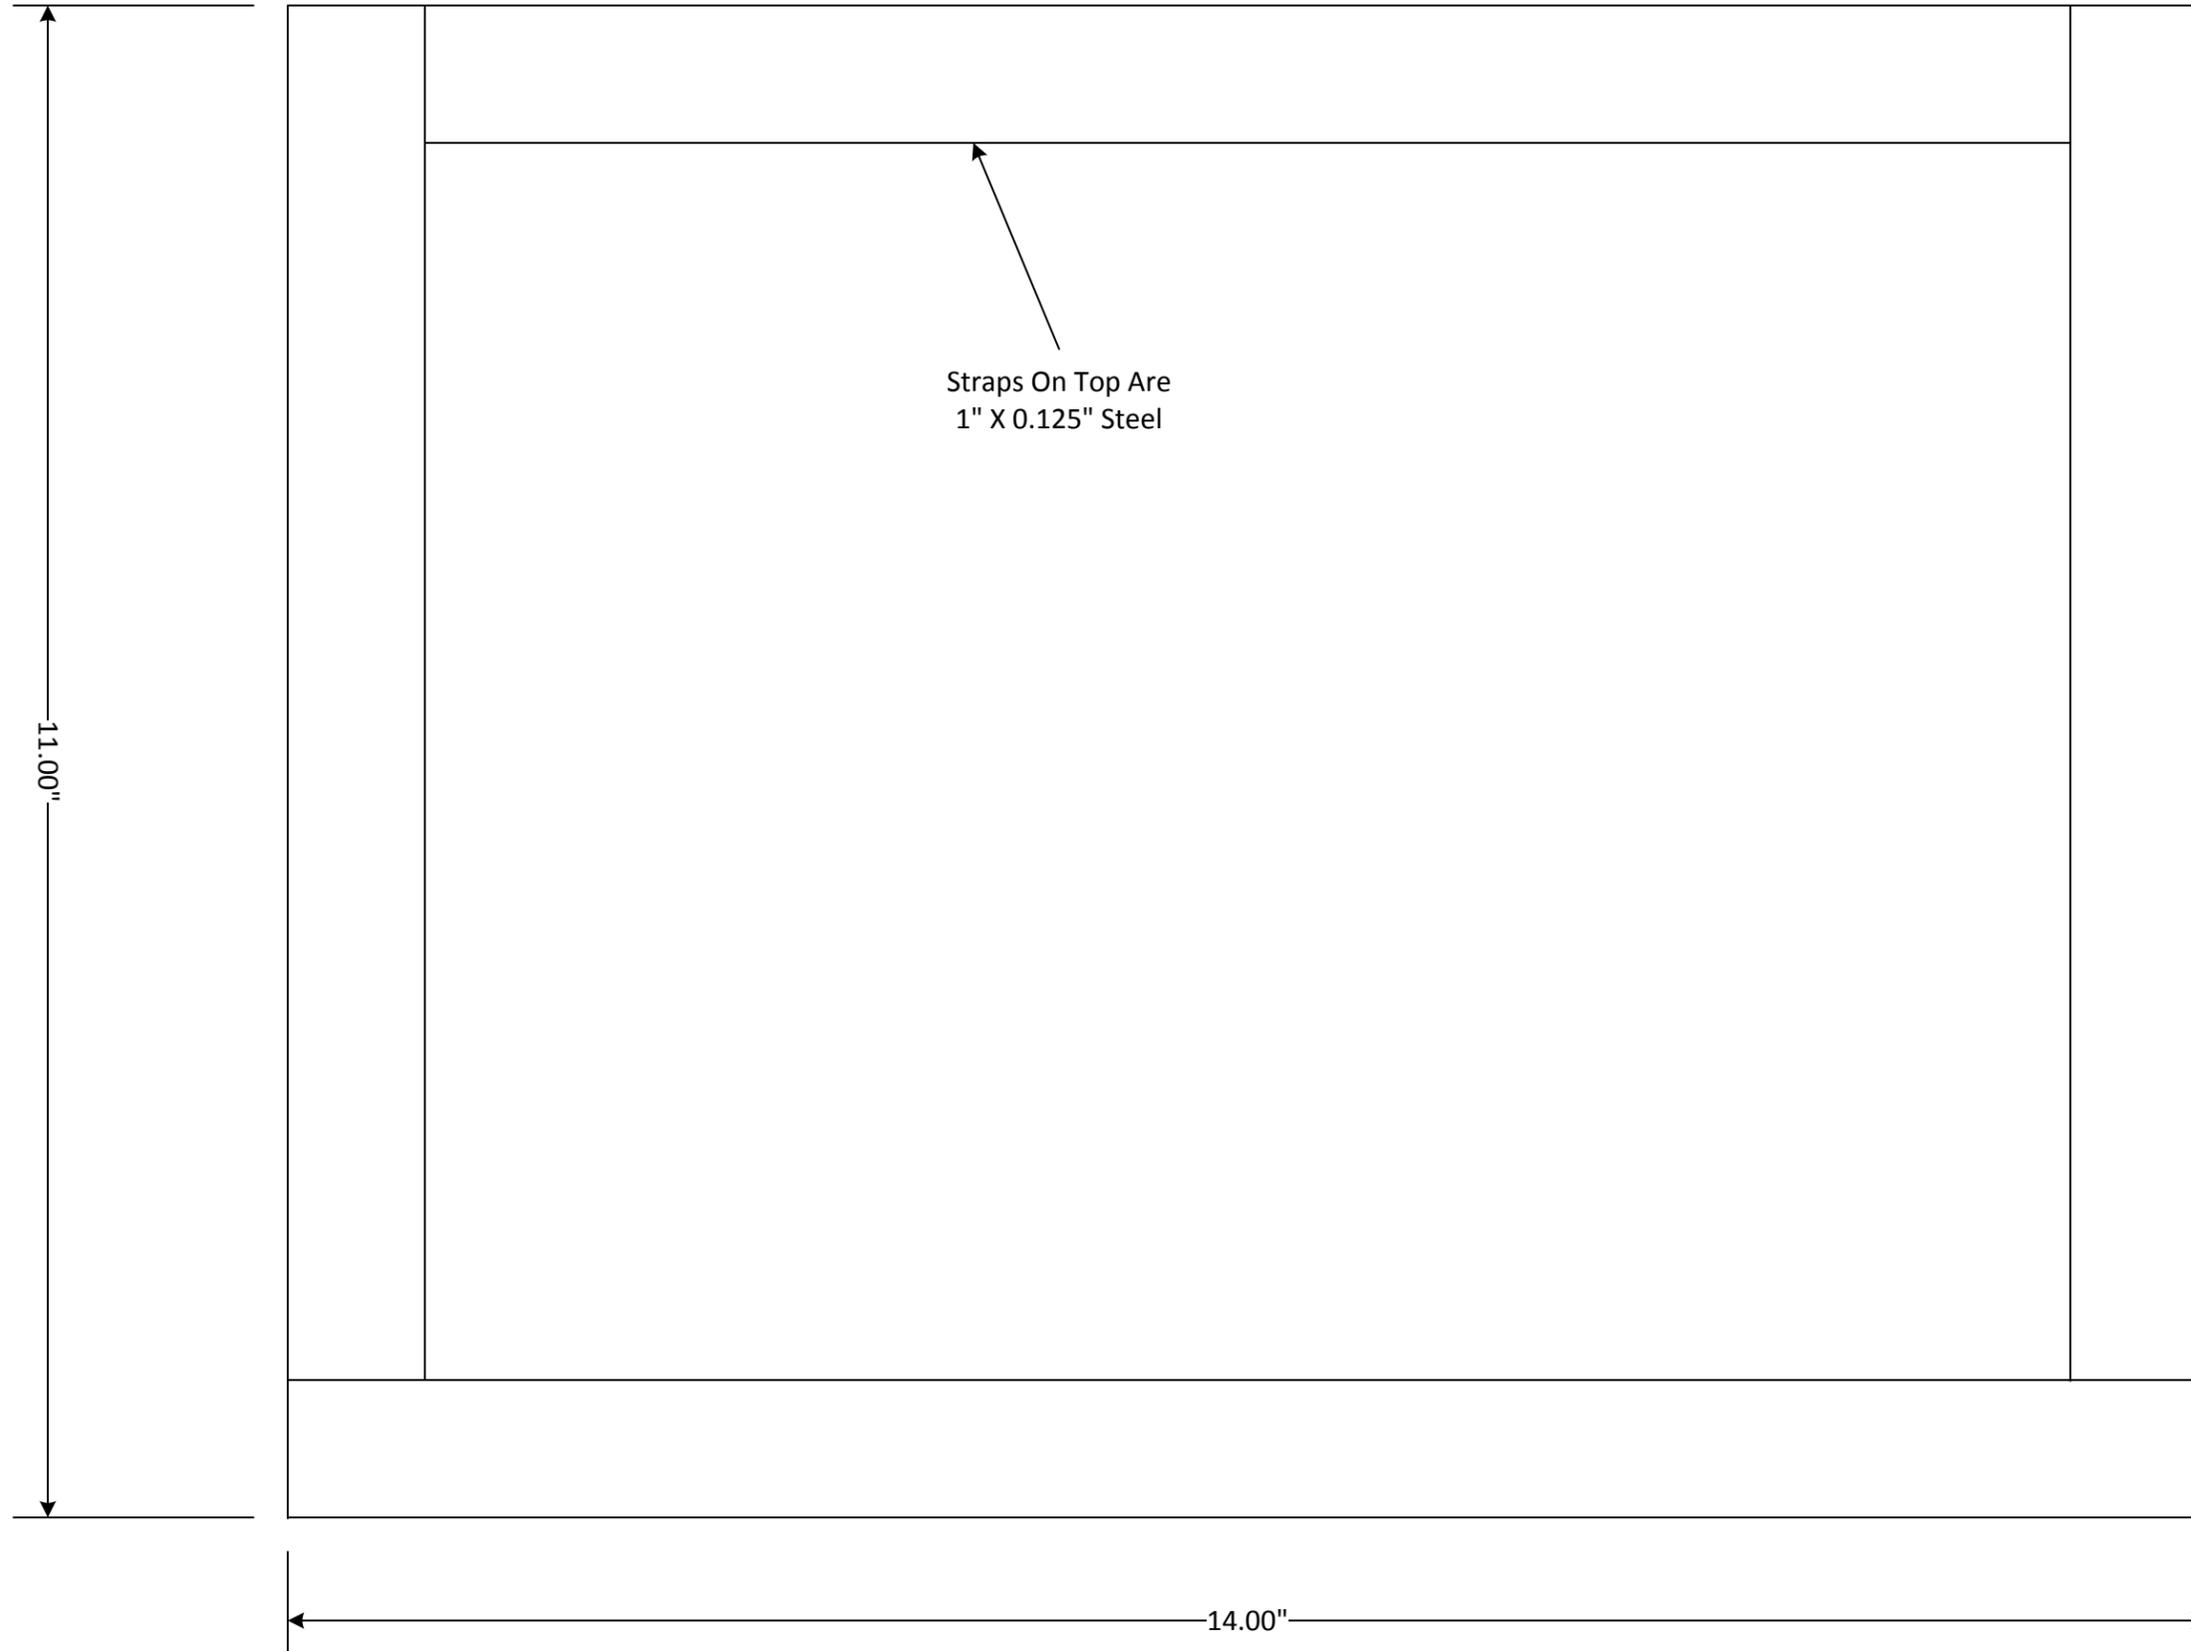

## Notes

All parts are 1" angle iron unless noted otherwise.


# Side View

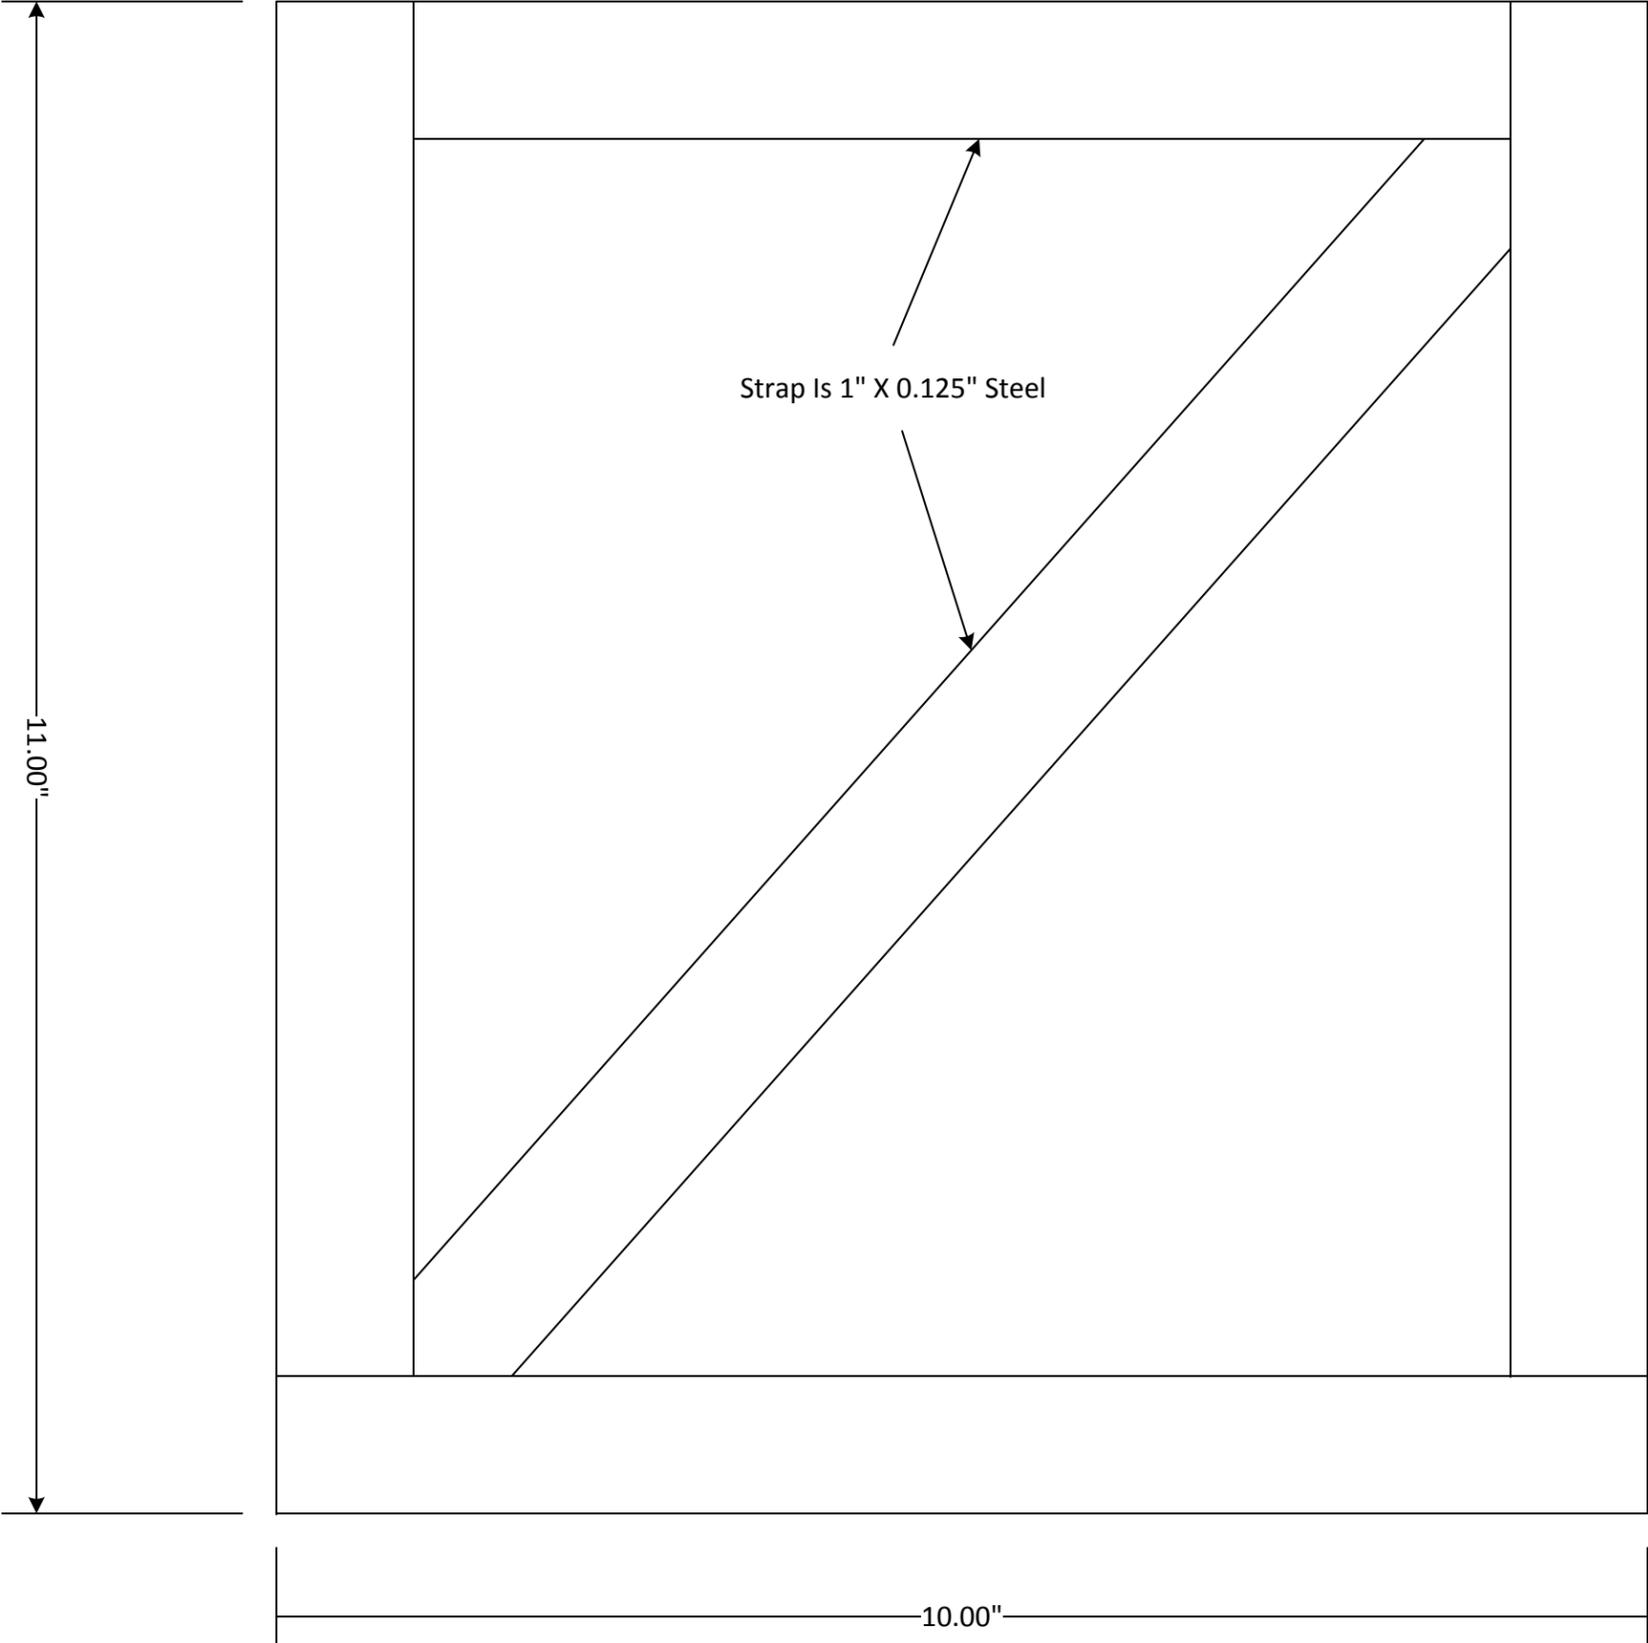

## Notes

All parts are 1" angle iron unless noted otherwise.

# Back View

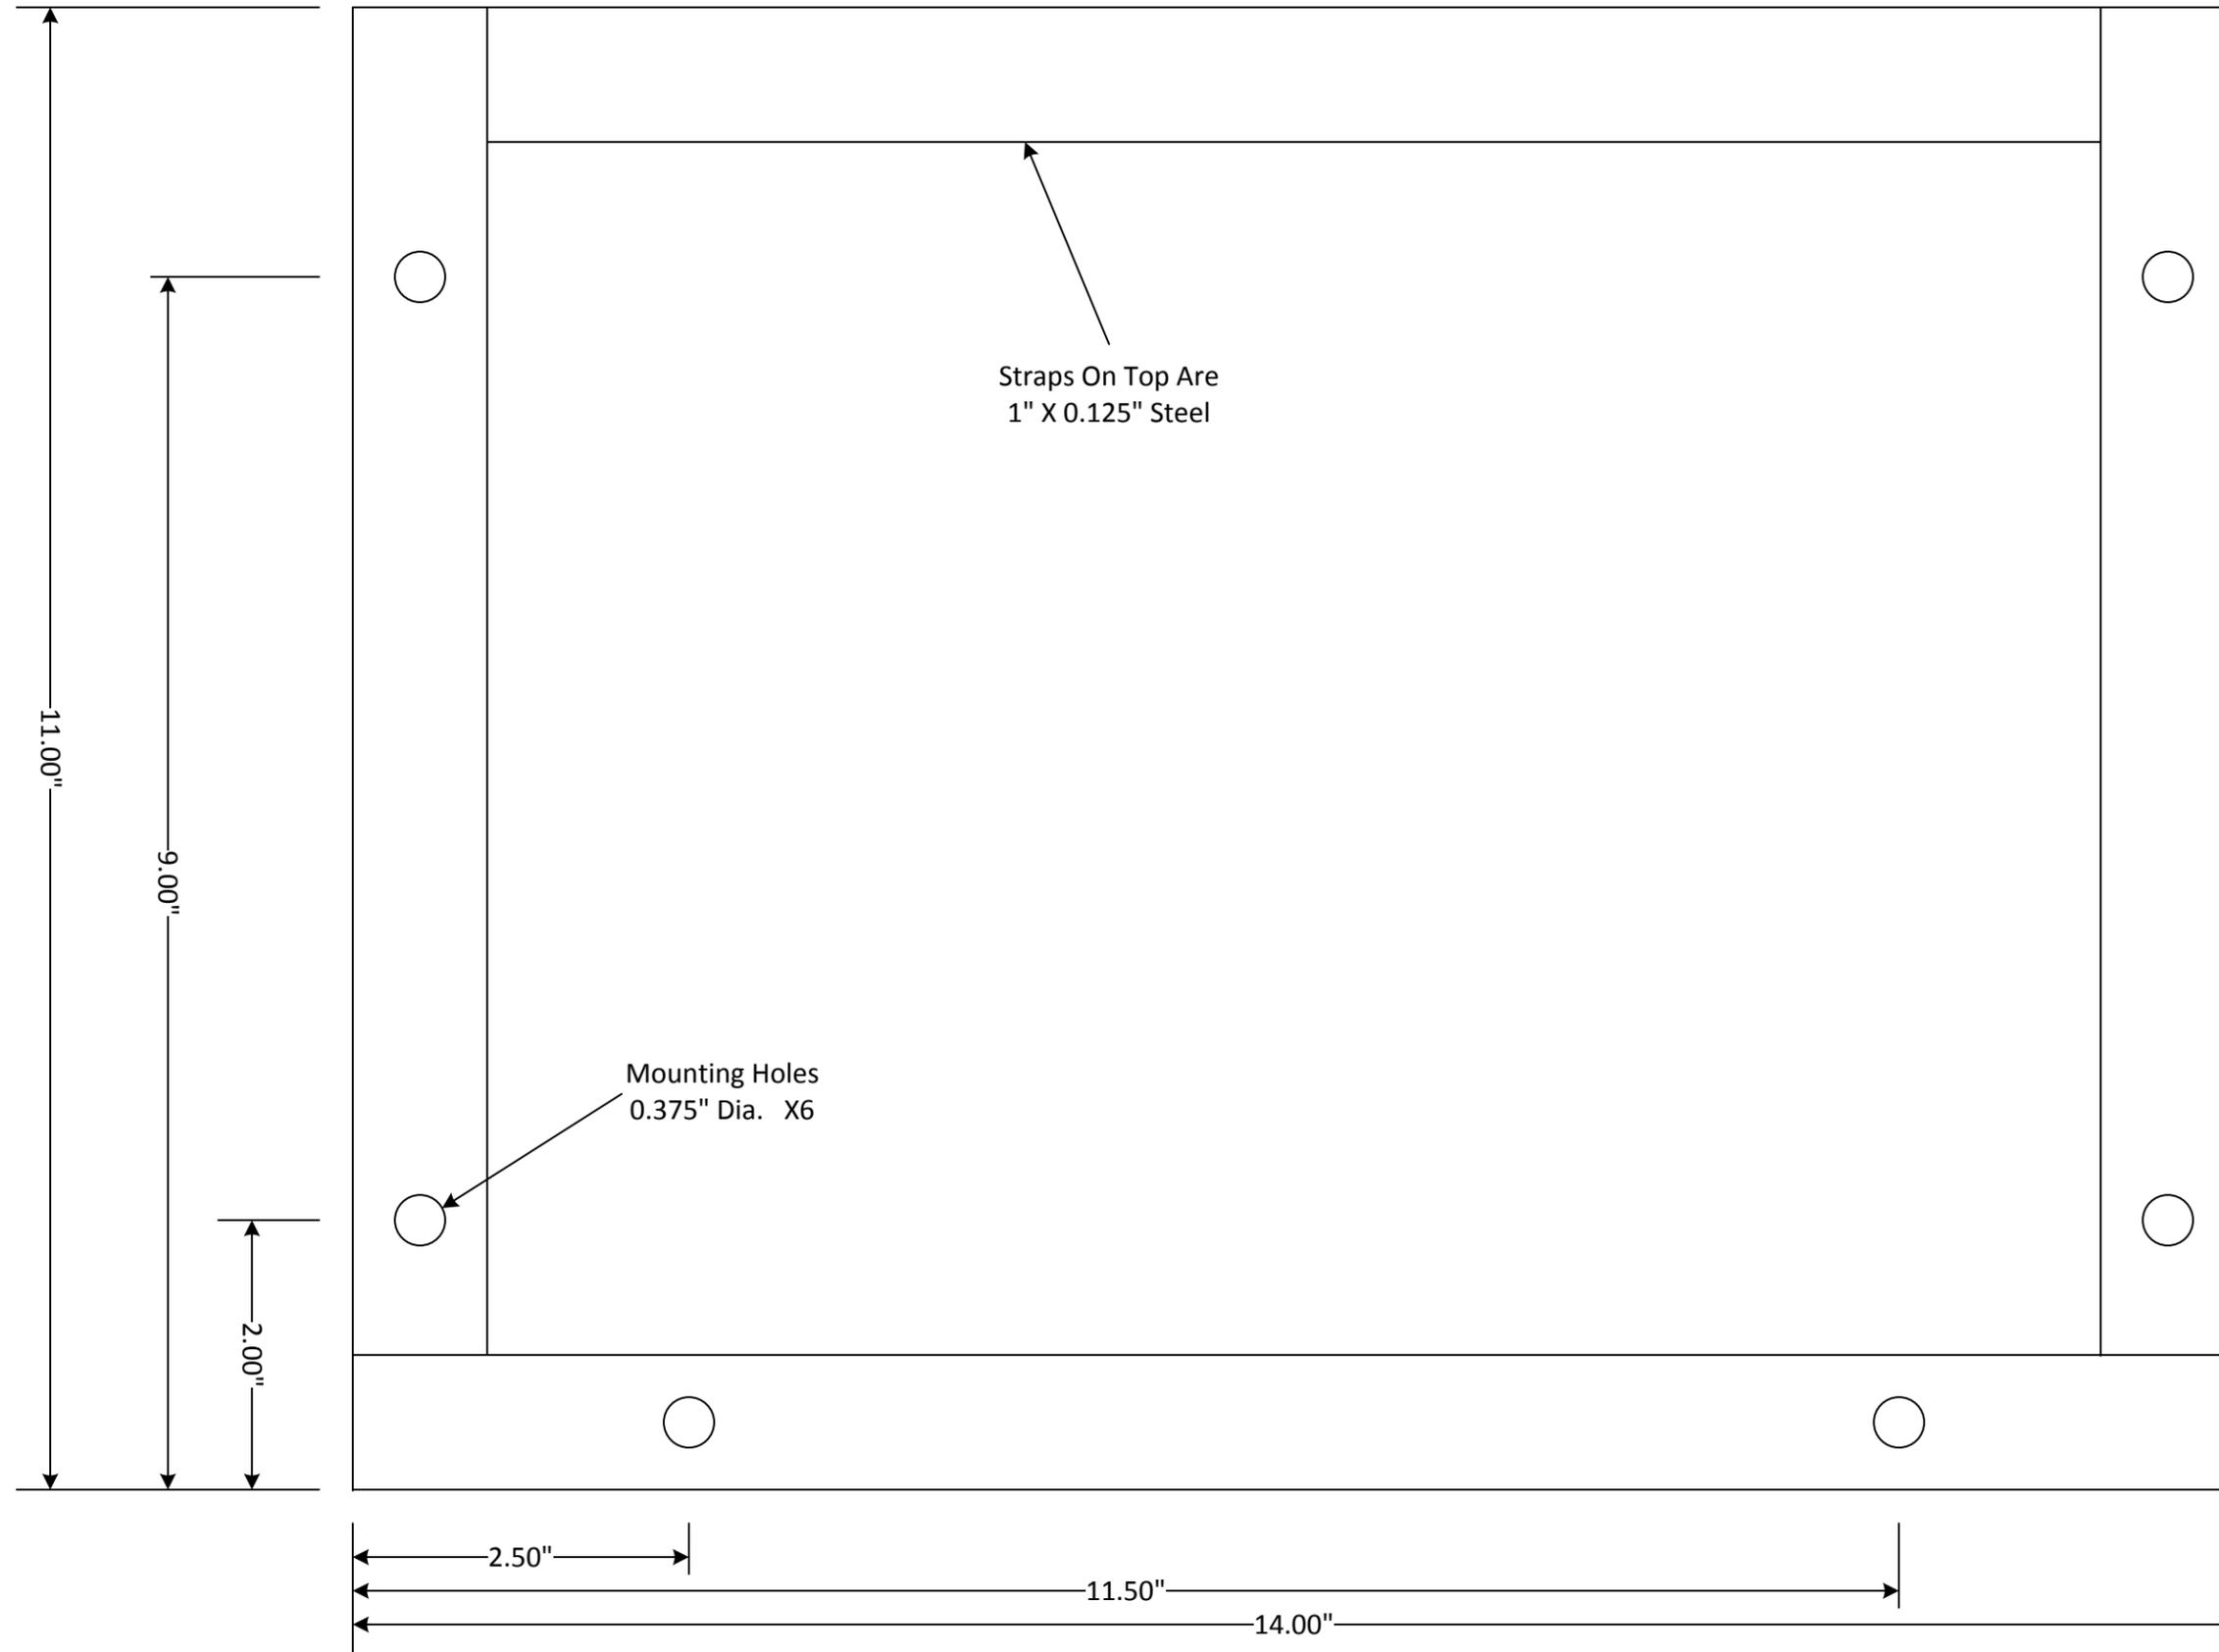


## Notes


All parts are 1" angle iron unless noted otherwise.

# Battery Clamp

Top View

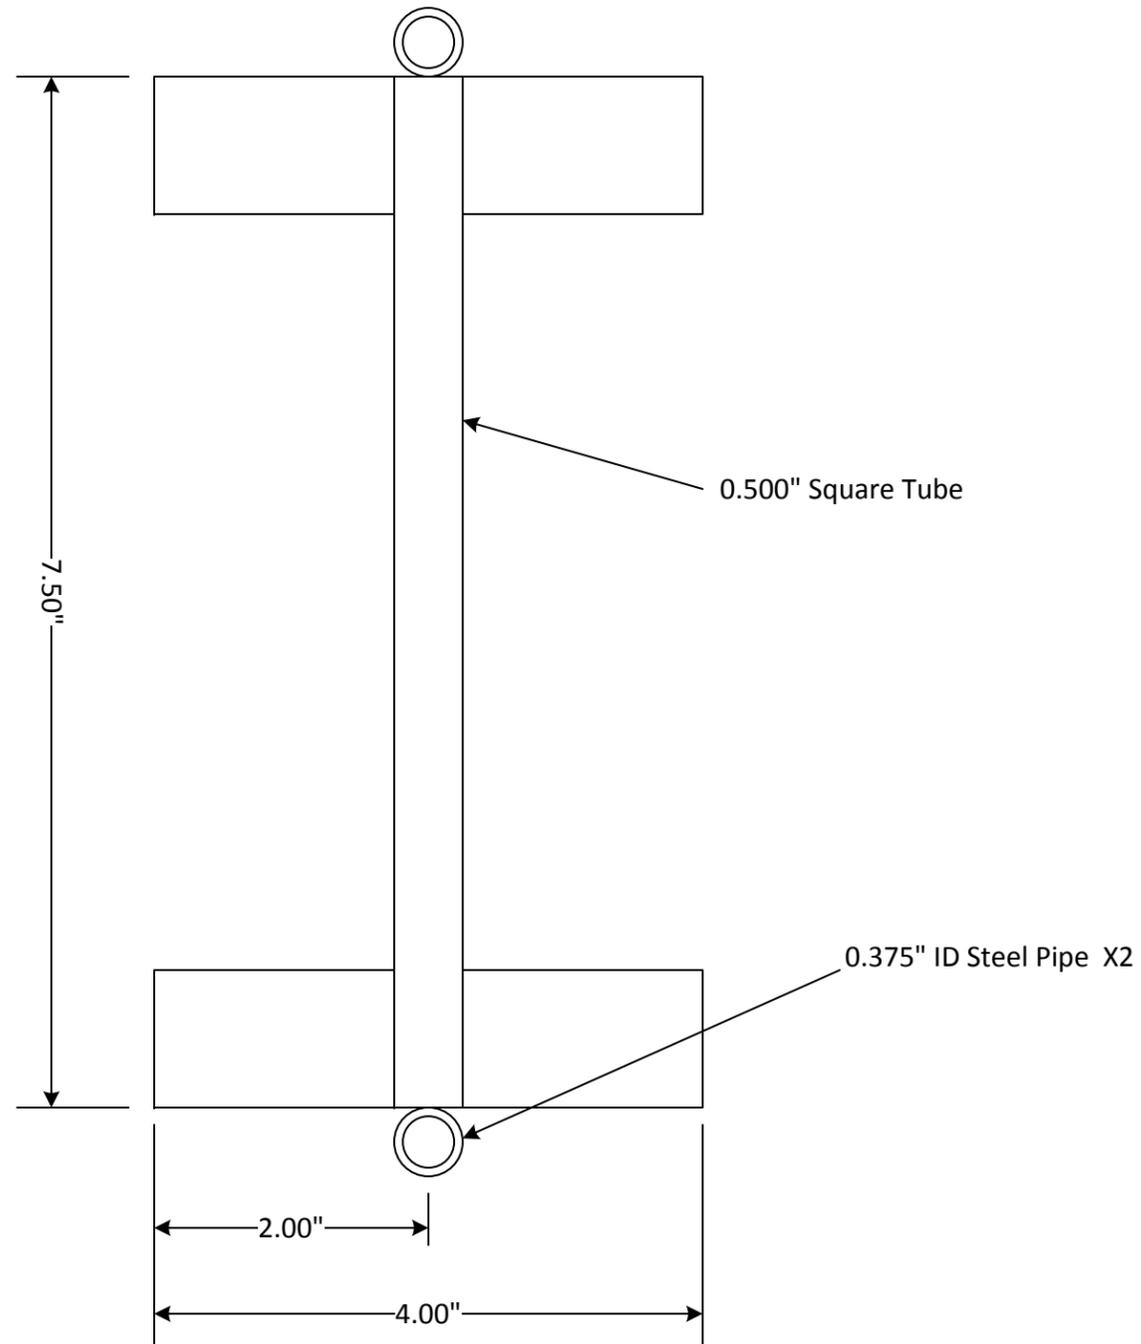

Side View

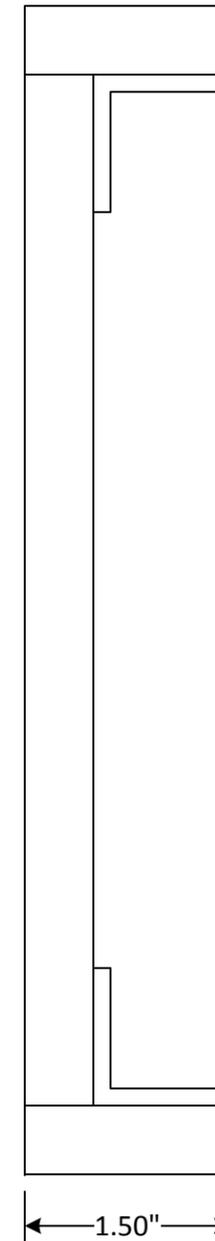

## Notes


All parts are 1" angle iron unless noted otherwise.

Painted with undercarriage coating.

1/8" Rubber cut to fit inside of angle iron to protect battery.

# Lid


Top View

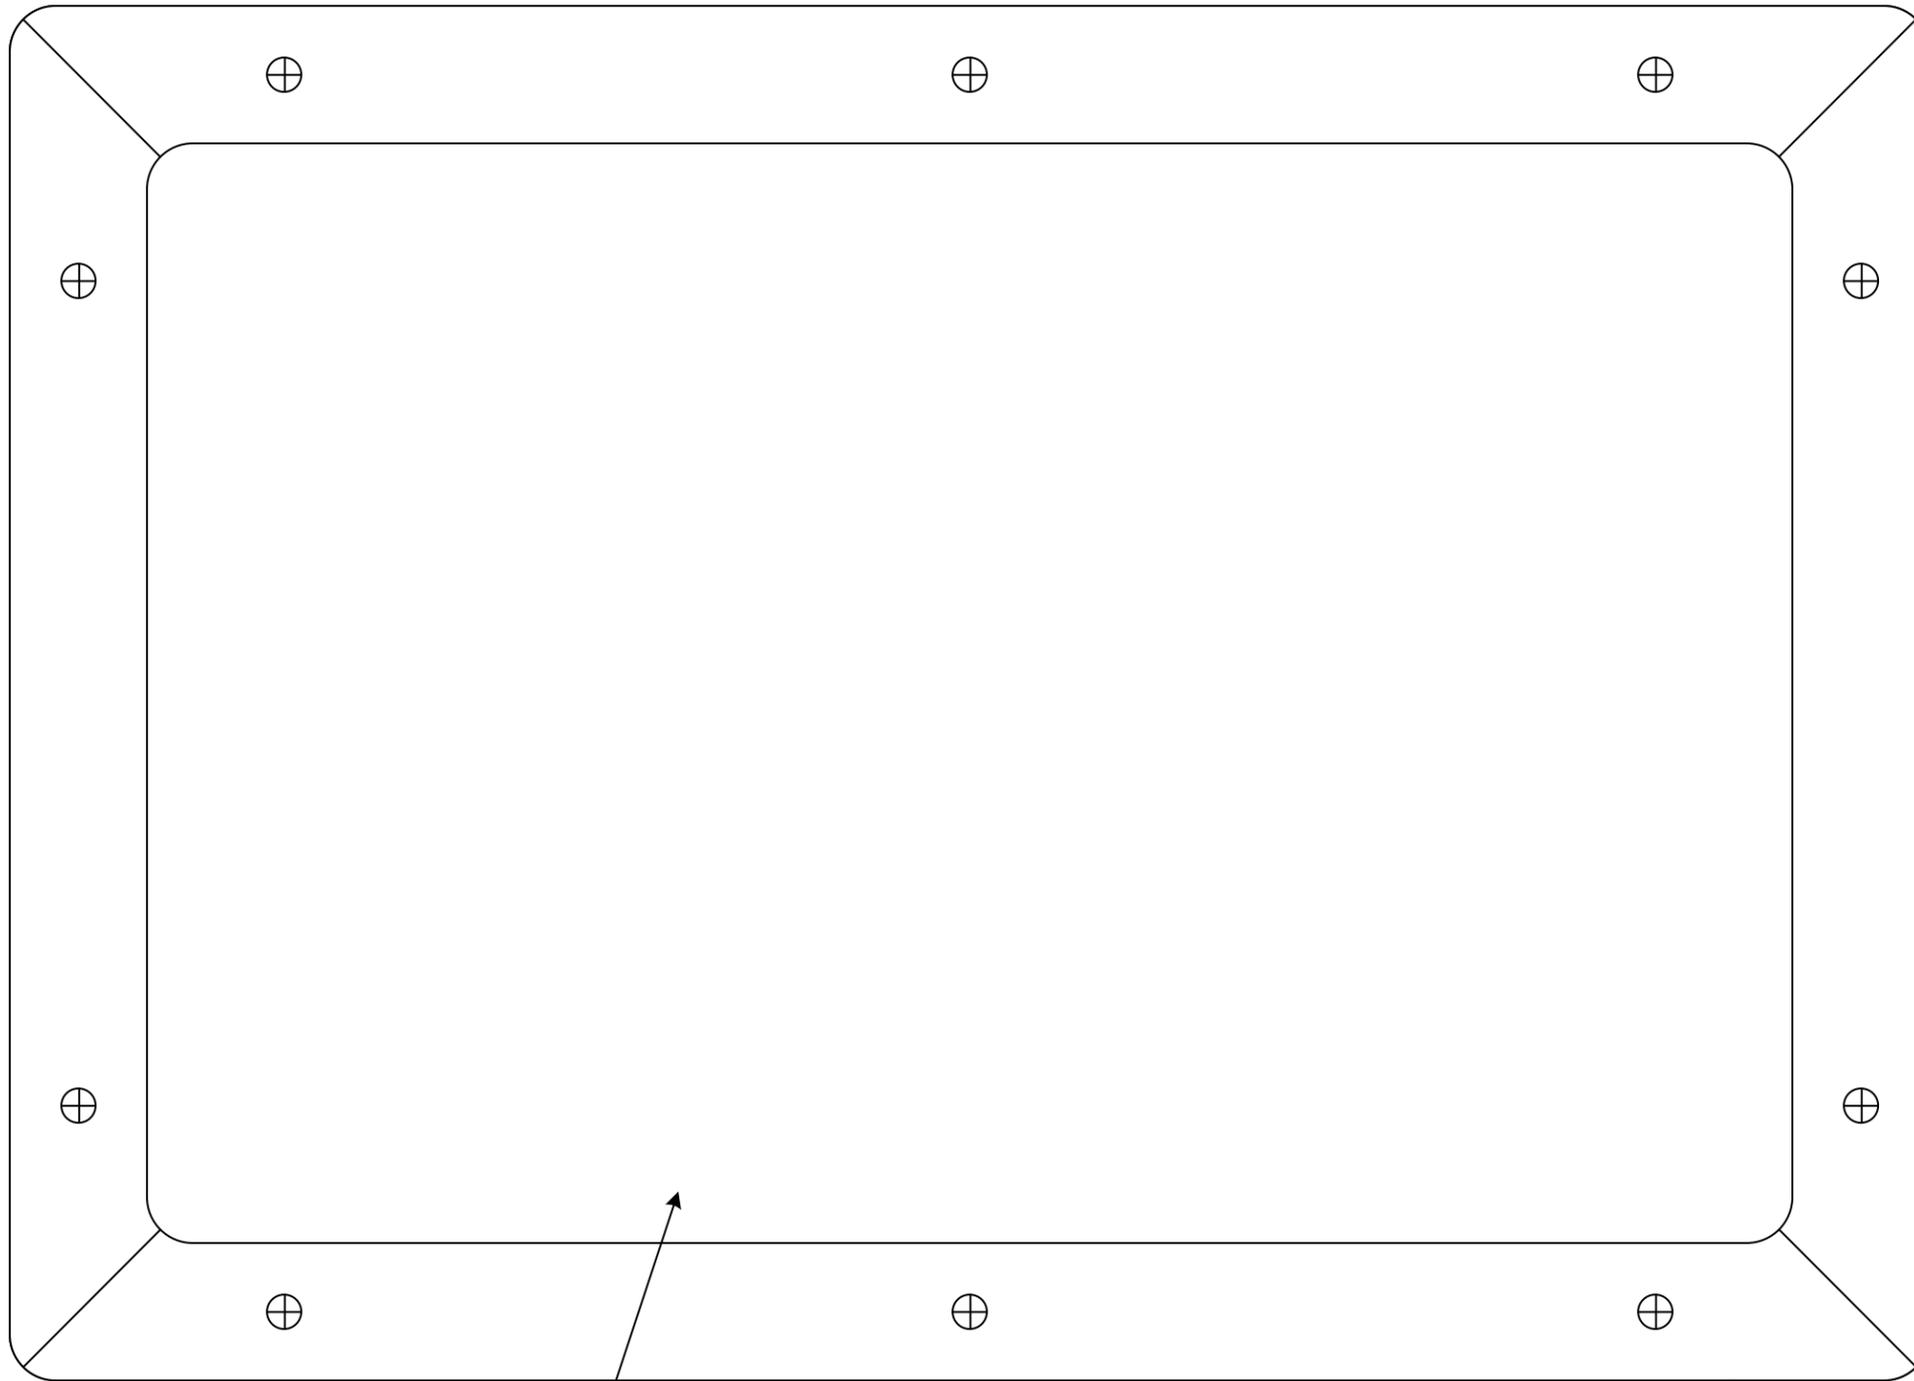

0.04" Aluminum Skin over plywood

1" X 0.0625 Angle Aluminum

Side View

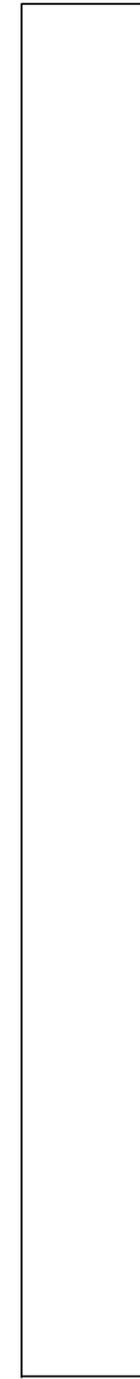

0.04" Aluminum

Construction



3/8" Plywood

## Notes

Corners rounded 1/2".

Plywood painted with undercoat.

Spring loaded toggle latch on both sides (not shown).